

POYO



Looking forward to being shining
like the jade is waiting for carving.



Product Size

HEIGHT	230 mm
170 mm	
130 mm	
DIAMETER	Φ 80 mm
Φ 113 mm	Φ 150 mm
Fixed / Adjustable	Fixed
Power	5 W
	► 80 W

Specification

Type	Surface-mounted Downlight
Power	5 W - 80W
IP Rating	IP 65
Dimming type	Non-dimmable/0-10V/Triac DIM
Color temperature	2700 K 3000 K 4000 K
CRI	80 90
Beam Angle	16° 25° 37° 40° 55°



Hilton Curio, Xiamen
Photo © VISUAL FEAST

VISUAL FEAST | CHINA HEADQUARTER
TEL: +86 0769 8539 7729
Find out more: www.vflighting.com
E-mail: info@vflighting.com



 VISUAL
FEAST



Canopy / Entrance



Humid Indoor/ Outdoor Space



Terminal / Station

POYO is surface-mounted light on the ceiling or wall, the internal driving design hid the driver perfectly.


A wide optional range of appearance, the whole series is included small, medium and large sizes. The adjustable structure has a horizontal rotation of 350 degrees and a vertical angle of 30 degrees to achieve the precise adjustment of the illuminated object.

From 5W to 80W, a complete range of beam angle supports the application from small space to high space

Internal drive design



POYO is surface-mounted light on the ceiling or wall, the internal driving design hid the driver perfectly. It means better waterproof and great sealing performance.

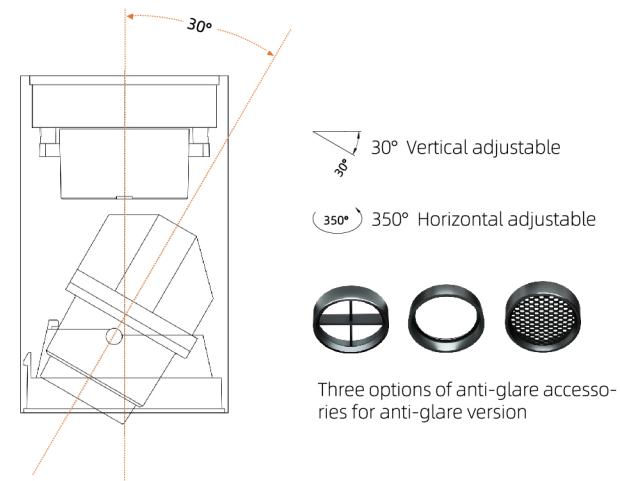

Three options of anti-glare accessories for anti-glare version

It is a particular design of adjustable mechanical function of the surface-mounted luminaire on the market. The adjustable structure has a horizontal rotation of 350 degrees and a vertical angle of 30 degrees to achieve the precise adjustment of the illuminated object.

APPLICATION

Indoors with heavy humidity and fog, such as bathrooms;
Outdoor spaces are not directly exposed to rain, such as the hotel entrance, canopy.
Besides, some sites are with long-term humidity, such as corridors, aisles, courtyards, etc.
Public spaces with special requirements, such as airport terminal, high-speed railway station, stadiums, etc.