


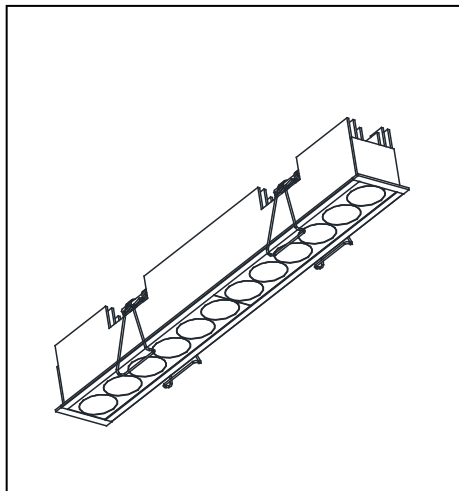


MIZAR 36

Mizar36 recessed installation instructions


Series	Cut-Out
LR00212	322*37mm

1.Installation Steps:

- 1 Drill a hole in the ceiling according to the hole - opening size corresponding to the model, and lead out the power cord.


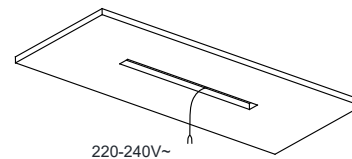


- 2 Disconnect the power supply, connect the driver to the power cord, arrange it, and then place the driver into the ceiling.

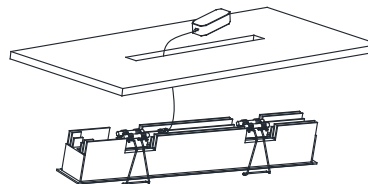

1.


2.

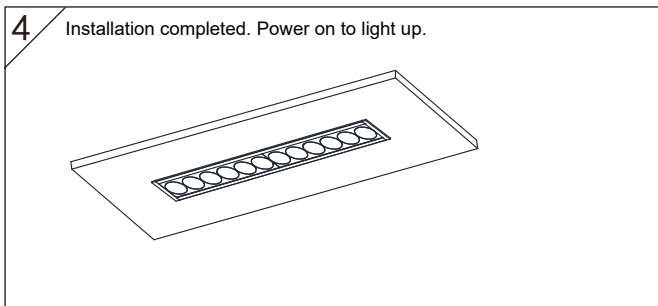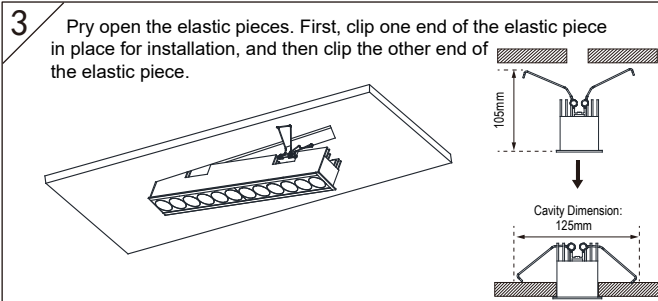

Precautions:

- 1、 Please carry out wiring, installation and other operations under power - off condition!
- 2、 Drill holes in the ceiling according to the hole - opening dimensions corresponding to the model.
- 3、 The wiring terminals cannot bear weight, and wire - lifting operations are not allowed during installation!
- 4、 The specific appearance shall be subject to the actual product!

3.

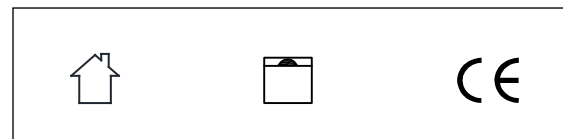

This product is only suitable for indoor, it is not allowed to be rinsed with water.



Independent external driver, recessed mounted.

- Use only drivers that comply with IEC or CE safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
 - Methyl acetate or ethyl acetate (i.e., nail polish remover)
 - Cyanoacrylates (i.e., "Superglue")
 - Glycol ethers (including Radio Shack ® Precision Electronics Cleaner - dipropylene glycol monomethyl ether)
 - Formaldehyde or butadiene (including Ashland PLIOBOND ® adhesive)
 - Dymax 984-LVUF conformal coating
 - Loctite Sumo Glue、 Loctite 384 adhesive、 Loctite 7387 activator
 - Gorilla Glue、 Bleach、 Bleach-containing cleaners, sprays

- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- Recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- It is recommended to use an ambient temperature of -15 ° C to 40 ° C for indoor lighting equipment
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person

4.