


Silk series installation instructions

SERIES	CUT-OUT
DR00501	Ø85mm
DR00502	Ø85mm







Installation instruction:

The luminaire should match following conditions before installation:

- 1、 Painting ceiling must be finished first.
- 2、 The row or symmetry and geometry of the luminaires, should be measured and draw before installation.
- 3、 Suggest to refer below sketch map when installation. H is the distance from the ceiling to the ground, A is the distance from the luminaire center to the wall, and B is the distance from the luminaire center to luminaire center.

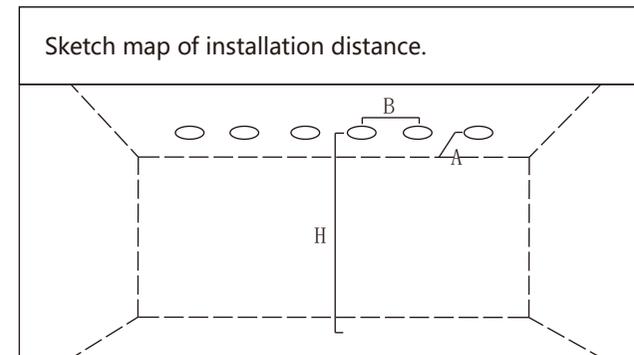

H: 2.7m A: 0.7m B ≤0.7m
H: 3.0m A: 0.8m B ≤0.8m
H: 3.5m A: 0.9m B ≤0.9m (Suggest to use 15W)



 This product is only suitable for indoor. It is not allowed to be rinsed with water.

 Independent external driver, recessed mounted.

- Use only drivers that comply with IEC or CE safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
 - Methyl acetate or ethyl acetate (i.e., nail polish remover)
 - Cyanoacrylates (i.e., "Superglue")
 - Glycol ethers (including Radio Shack @ Precision Electronics)
 - Cleaner - dipropylene glycol monomethyl ether
 - Formaldehyde or butadiene (including Ashland PLIOBOND @ adhesive)
 - Dymax 984-LVUF conformal coating
 - Loctite Sumo Glue, Loctite 384 adhesive, Loctite 7387 activator
 - Gorilla Glue, Bleach, Bleach-containing cleaners, sprays
- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- Recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person